

Sistema de alarma de seguridad digital. Inalámbrico

CE200F

El CE200F es un sistema de alarma para el hogar que detecta intrusiones y fuego. Está programado para enviar mensajes de voz y llamar a los números predeterminados por el usuario, cuando detecta algún intruso o fuego dentro de la casa. Adicionalmente usted puede controlar los sonidos y asustar al intruso con la función de altavoz.




1. **ALTAVOZ**
2. **TECLADO**
3. **MICRÓFONO**
4. **SENSOR DE INTRUSIÓN**
5. **SENSOR DE FUEGO**
6. **BOTÓN DE EMERGENCIA**


Características

- Llama hasta 5 números de teléfonos designados
- 24 horas de vigilancia de intrusión e incendios, sin cuotas mensuales
- Verificación de control de sonido y voz de alerta desde lugares remotos
- Active y desactive el sistema desde cualquier teléfono
- intrusión, incendio, de gas, de emergencia, la falta de energía
- Indicador de batería baja con pantalla LCD y mensaje de voz
- Compatible con el uso de todas las líneas de comunicación (Tono, pulso, ADSL y RDSI)
- Llamada de emergencia se pueden realizar incluso si el teléfono o la línea de fax está ocupado
- Se puede armar el perímetro: función útil para mantener a las mascotas en la casa
- Después de la confirmación, el sistema puede ser desactivado para detener el ciclo de llamadas
- Modo de prueba para una fácil instalación


Aplicaciones

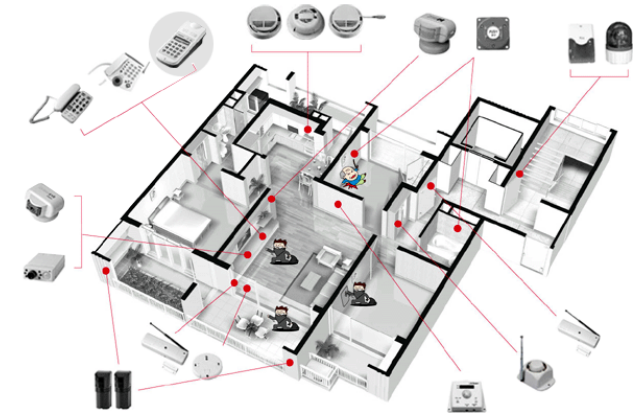


Rango de detección

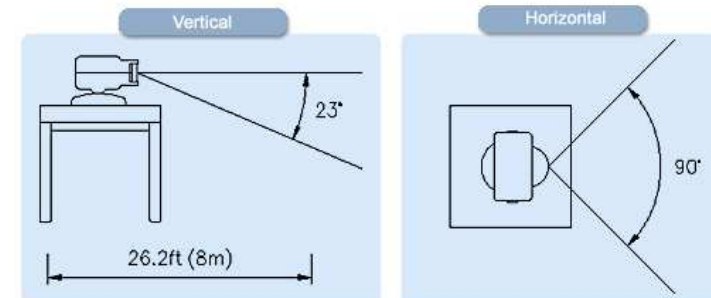

Conexión a la pared

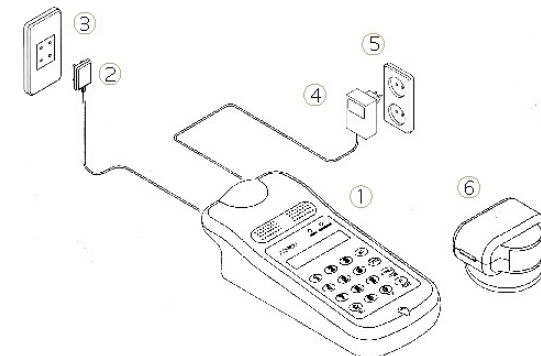



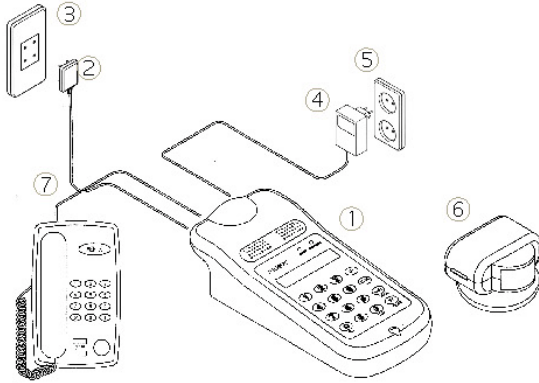











Conexión al teléfono



Especificaciones

ITEM		CYBEREYE
MODEL		CE-200F
Function	Intrusion	O
	Fire	O
	Emergency	O
	Power Failure	O
	Gas Leakage(option)	O
	Life Sensor (option)	X
	Car sensor (option)	O
Detection Range	Detection distance 8 m(Horizontal: 90°, Vertical: 23°)	
Detecting Temperature	Above 60°C	
Phone No. Entry	8	
Memory Phone No. Entry	X	
Information Confirmation	LCD + Voice	
Voice Range	X	
Voice Alarm	For Activated Sensors	
Voice Message	Location and Emergency type	
Wireless Range	100m (Depends on the obstacles)	
Power	AC adaptor (DC 9V Rechargeable Back-up battery)	
Size	204 X 96 X 60mm	
Weight	490g	
Options	Refer to Optional sensors' specifications	

Opciones

Item	Contents
Wireless Motion Sensor (BS-200F)	
	It activates the Cybereye, wireless siren and wireless emergency lamp with radio wave when it detects an intruder or a fire.
Wireless Door Sensor (DS-200F)	
	It activates the Cybereye, wireless siren and wireless emergency lamp with radio wave when it detects an intruder entering through a door or a window.
Wireless Siren (SR-200F)	
	It sounds a loud alarm (105dB) when it receives a signal from a remote control, emergency switch or other optional sensors
Wireless Emergency Switch (ES-200F)	
	It activates the Cybereye, wireless siren and wireless emergency lamp with radio wave when the emergency switch is pressed.
Wireless Smoke Sensor (SS-200F)	
	It activates the Cybereye, wireless siren and wireless emergency lamp with radio wave when it detects a fire.
Wireless Smoke Sensor (SS-300F)	
	It sounds an alarm and activates the Cybereye, wireless siren and wireless emergency lamp with radio wave when it detects a fire.
Wireless Gas Sensor (GS-200F)	
	It activates the Cybereye, wireless siren and wireless emergency lamp with radio wave when it detects gas leakage.
Wireless Window Sensor (WD-200F)	
	It activates the Cybereye, wireless siren and wireless emergency lamp with radio wave when it detects a window breakage or impact.
Wrist Transmitter (WS-200F)	
	It activates the Cybereye, wireless siren and wireless emergency lamp with radio wave when the emergency button is pressed.
Pendent Transmitter (PR-200F)	
	It activates the Cybereye, wireless siren and wireless emergency lamp with radio wave when the emergency button is pressed.
Wireless Outdoor Sensor (OS-200F)	
	It activates the Cybereye, wireless siren and wireless emergency lamp with radio wave when it detects an intruder outdoors.
Wireless Emergency Lamp (LP-200F)	
	It blinks and sounds an alarm when it receives a signal from the optional sensors or emergency button is pressed.
Wireless Emergency Lamp (LP-300F)	
	It blinks and sounds an alarm when it receives a signal from the optional sensors or emergency button is pressed. (Back up battery)
Security Digital Camera System (IC-100A, IC-300C)	
	Image capture when it detects an intruder.