

Sistema de alarma de seguridad digital. Inalámbrico

CE100

Características

- Alarma de seguridad con detección de fuego y de intrusos (24h).
- Llama hasta a 5 números memorizados.
- Guarda 5 teléfonos y un "pager".
- Permite grabar un mensaje saliente con su propia voz.
- Verifica los datos de entrada de acuerdo con la dirección de la voz.
- Puede deshabilitarse tras la confirmación.
- Permite avisar al intruso mediante micro y altavoces.
- Opera con batería (tamaño AA: 6 meses - 1 año).
- Sensor cableado para puertas (opc.)



Aplicaciones



1. Speaker phone



2. Microphone



3. Intrusion Sensor



4. Fire Sensor

Operación




Especificaciones

ITEM	CYBEREYE
MODEL	CE-100
Function	
Intrusion	O
Fire	O
Emergency	X
Power Failure	X
Gas Leakage(option)	X
Life Sensor (option)	X
Car sensor (option)	X
Detection Range	Detection distance 8 m(Horizontal: 90°, Vertical: 23°)
Detecting Temperature	Above 60°C
Phone No. Entry	5
Memory Phone No. Entry	X
Information Confirmation	Voice message
Voice Range	X
Voice Alarm	X
Voice Message	Location and Emergency type
Wireless Range	X
Power	AA size 1.5V X 3
Size	112 X 80 X 57mm
Weight	258g
Options	Wired door sensor


Aplicaciones



Conexión al teléfono y pared




▲ Connection with a telephone



▲ Direct connection to the wall outlet

Rango de detección

Horizontal




- Horizontal : 90°
(From the center: Right 45° Left 45°)


- Vertical : 23°
(From the center : downward)

- Distance : 8M (26.2ft)
*When installing Cybereye Eco, Place the system at a proper place after testing sensor's detecting angle and distance


Vertical



Como cambiar la batería

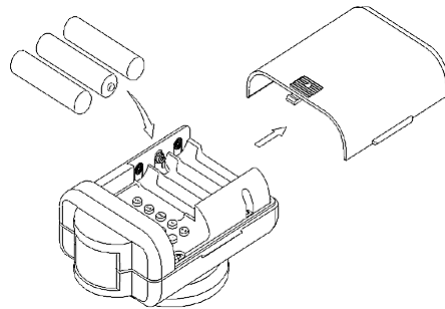

Opciones

Item	Contents
	Wired Door Sensor (DS-200C) It activates Cybereye Eco when it detects a intruder entering through a door or a window