


Cámara IP 36INF48



Características:

- 1/3" color CCD
- Minimum iluminación 0.5 Lux
- 480TVL
- Compensación trasera
- Auto iris
- Auto balance de blancos
- Compresión: MJPEG / MPEG-4
- Flexible conexión: LAN, ADSL, ISDN
- Video transmisión: 25fps

Dimensiones

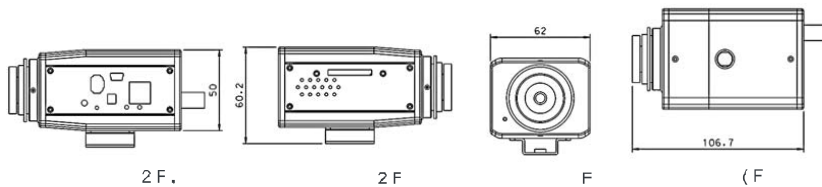

Multi site video reception software



Simultaneous monitoring of remote sites via de internet

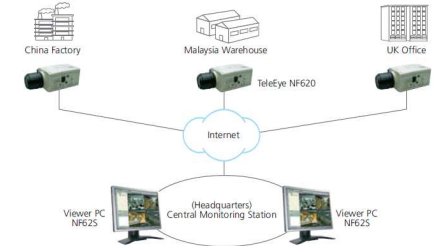


IMAGE SENSOR	
Type	1/3" Colour CCD
Minimum Illumination	0.5 Lux at F1.2
Electronic Shutter	1/50 - 1/100,000 sec on / off switchable on hardware
Back Light Compensation	on / off switchable
White Balance	Automatic: 2,500° K – 9,500°K
Flickness	on / off switchable
Resolution	MPEG-4 : 720 x 576, 720 x 288, 640 x 480, 640 x 240, 320 x 288, 320 x 240 MJPEG : 720 x 576, 352 x 288
Video Output	625 lines, 25 frames per second composite video, 1Vp-p, BNC
LENS	
Mounting	C / CS mount
Auto Iris	Support DC lens
CONNECTION	
Network	Ethernet (RJ-45 Wired, 10/100 Base-TX)
Network Protocol	TCP/IP, DHCP, HTTP, SNMP, DDNS, DNS, SMTP
No. of Concurrent Users	8
Web Server	Built-in
SD Socket	Yes
Data Interface	RS-232
VIDEO COMPRESSION	
Compression	MJPEG / MPEG-4
Max. Transmission Frame Rate	up tp 25fps
EVENT HANDLING	
Event	Motion detection
Action	Recording, E-mail
Alarm	1 input / 1 output
Privacy Zone Masking	3
POWER	
Voltage	5V DC / 2A
OPERATING ENVIRONMENT	
Ambient Temperature	5°C - 50°C
Relative Humidity	20% – 80% (no condensation)
MECHANICAL DESIGN	
Dimension	62 mm (W) x 50 mm (H) x 95 mm (D)
Net Weight	306g