



**GETESA**  
GENERAL DE TELECOMUNICACIONES, S.L.

## SC103

***Sistema de control de acceso profesional por tarjeta de proximidad, usa una comunicación PSK (modulación en fase) y verificación de ID para encriptación profesional.***



### **Características:**

- Fácil instalación con sistema de operación de alta velocidad
- Sistema LINUX, fácil de integrar con otros sistemas
- Autónomo / Entorno de red
- Control de acceso, soporta 50 zonas horarias, 5 grupos, 10 combinaciones de puerta
- 24 horas de operación continua
- Mayor seguridad, soporta alarmas múltiples
- Soporta tarjeta de proximidad EN125KHz o tarjetas compatibles.
- Altavoz, multilinguaje
- Capacidad de tarjetas: 30.000. Registros: 50.000.
- Velocidad de identificación: <0.2ms
- Rango de lectura: 10-15cm




**GETESA**  
GENERAL DE TELECOMUNICACIONES, S.L.

## Especificaciones

<b>Display/Speaker</b>	<b>Language</b>
LCD Display: 4 lines white LCD Display	Multi Language, English, French, Spanish, Arabic, etc., for more
Speaker: Voice Prompt, language can be selected	than 15 languages can be selected
<b>Environment</b>	<b>Technical Specifications Capacity</b>
Fingerprint capacity: 30,000 cards	Operation temperature: 0°C ~ 45°C
Log capacity: 50,000 records	Operation humidity: 20% ~ 80%
<b>Verification/Identification</b>	<b>Machine Size</b>
Matching method: 1:N or 1:1	125(L)*95(W)*45(H)mm
Identification speed: ≤0.2ms	<b>Function support</b>
<b>Communication</b>	Wiegand, WorkCode, SMS, 9PIN, Auto Status, USB
TCP/IP, RS232/485, Wiegand in/out, USB	<b>Access control</b>
<b>Attendance status:</b>	50time zones, 5groups, 10open door combination, supports
Check in, Check out	Multi-users enter. TTL for connecting to lock, door sensor, exit button, alarm
<b>Power</b>	<b>Customize Function</b>
110/220VAC ~ 12VDC (power supply PS-2A is optional item)	Webserver, Antipass-back
<b>Access Mode</b>	
<b>Card Only, PIN Only, Card+PIN</b>	
<b>Read Range</b>	
10-15 cm	

## Diagrama de conexión

### Standalone

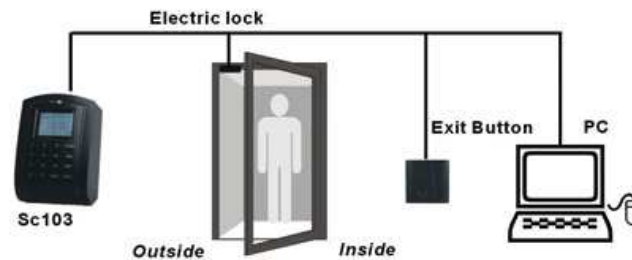

### Network

