

Cámara IP 37IIF42

Características:

- Control PT
- 1/4" color CMOS
- Captura en tiempo real
- M-JPEG
- 300,000 pixeles

WIFI




Especificaciones

Modelo	37IIF42
Image Compression Format	M-JPEG standard
Image Resolution	VGA(640x480)
Wireless support	802.11b/g
Sensor	1/4" CMOS, 300,000 Pixels
Horizontal Rotating Angle	120°(+/-60°)
Vertical Rotating Angle	60°(+/-30°)
Automatic Brightness Adjustment	support (Can be used outdoor)
Alarm Mode	motion detection/alarm and I/O alarm
Video Display	Microsoft Media Player
Image Transfer Velocity	30fps@VGA
Image Display	single
Minimum Illumination	0LUX
Video Format	AVI
Network Interface	RJ-45 10-100 Base T
Network Protocol	TCP/IP, FTP,SMTP, HTTP, ICMP, PPPoE
Monitor Mode	IE browser
Software Upgrade	Automatic upgrade
Security	User management system, password protection, password setting: administer, monitor, scrutiny
Working Condition	0°C ~ 50°C , 20% - 80%PH
Power Adapter	DC5V/2A 50/60Hz
System Requirement	CPU : 2.0GHz or above Memory : 256M or above Network Card : 10M or above Display Card : 64M or above Operating System : Windows2000 or Windows XP

Angulo de rotacion




Dimensiones

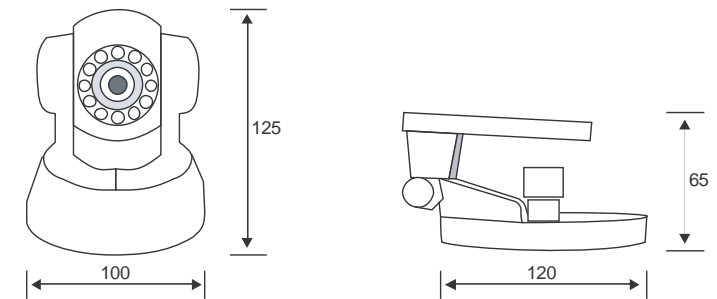


Accesorios



Adapter



network line



CD